




COMMERCIAL KITCHEN EQUIPMENT



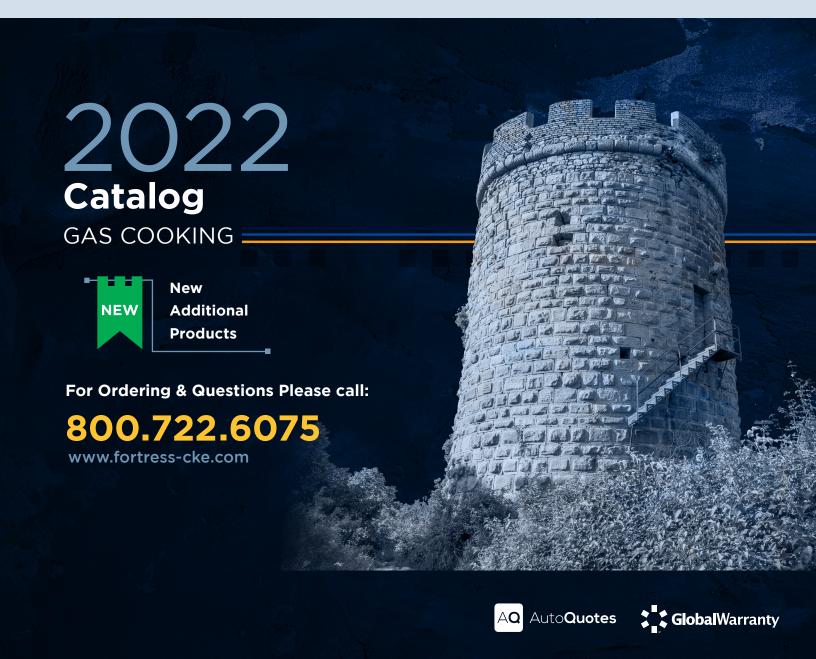

Built to last and built to perform, Fortress™ creates the cookware for kitchen excellence. When peak demand sets the work flow, the food-service industry needs reliable quality equipment to get the job done. That's were we step in to deliver time and again cookware that performs. Our solid dependable stable of products will be the fortress ready to stand strong and resolute for years of unwavering tireless service.

TABLE OF CONTENTS



www.fortress-cke.com

© Copyright 2022 Fortress. All rights reserved.

Reproduction without written permission is prohibited.

GAS FRYERS







Standard Features:

- Fully assembled flue.
- Tank stainless steel providing durability for high production output.
- 1 1/4" Full port drain valve for fast draining.
- Cabinet Stainless steel front, door and sides.
- Millivolt Thermostat, 200°F 400°F.
- 1 year limited warranty, parts and labor.

- High-Temperature safety limit switch.
- Thermo-Safety pilot with built-in regulator.
- Separate Manual gas shutoffs, for front servicing.
- Heavy-duty cast iron burners.
- Tubes constructed of heavy gauge metal.
- Heavy gauge deflector system providing a quicker recovery time.

- 30,000 BTU/h per burner.
- Manifold pressure is 4" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGF40L	3 Tube LP Gas - 40 lbs.	90,000	16" W x 33" D x 48.42" H	150 lbs.
FGF40N	3 Tube Natural Gas - 40 lbs.	90,000	16" W x 33" D x 48.42" H	150 lbs.
FGF50L	4 Tube LP Gas - 50 lbs.	120,000	16" W x 33" D x 48.42" H	183 lbs.
FGF50N	4 Tube Natural Gas - 50 lbs.	120,000	16" W x 33" D x 48.42" H	183 lbs.
FGF75L	5 Tube LP Gas - 75 lbs.	150,000	20" W x 33. 70" D x 48.42" H	209 lbs.
FGF75N	5 Tube Natural Gas - 75 lbs.	150,000	20" W x 33. 70" D x 48.42" H	209 lbs.











Standard Features:

- Stock Pot Range: (1) 3-Ring Burner.
- Stainless steel panel and sides.
- 18" x 21" cast iron top grates designed for easy movement of pots across top sections.
- Deflectors to direct waste to crumb/drip pan.
- Large front panel, promoting safety and great functionality.
- Chrome plated injected aluminum knobs providing for better toughness and durability.
- Lower cabinet storage cavity.
- Easily removable stainless steel crumb/drip pan.
- Heavy duty legs with adjustable feet.

- 90,000 BTU total output per burner.
- ☐ ☐ ☐ Heat selections from simmer to high heat.
 - Burner utilizes two adjustable gas valves for the inner and outer rings.

Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGSP1	Stock Pot with Single Burner	90,000	18" W x 23.83" D x 23.81" H	121 lbs.
FGSP2	Stock Pot with Double Burner	180,000	18" W x 44.88" D x 23.81" H	222 lbs.





GAS CHARBROILERS









Standard Features:

- Available in 18", 24", 36" and 48" width.
- Stainless steel panel and sides.
- 14" gauge polished stainless steel construction.
- Removable cast iron double-sided top grates, angled for better flame control (flat and 15° angle).
- Cast iron radiant for optimum heat distribution that are individually removable for easy cleaning.
- Enamelled burners placed every 12", providing uniformity when operating.
- Accessible pilots through front panel.
- Chrome plated injected aluminum knobs providing for better toughness and durability.
- 1 year parts and labor warranty.
- 4" adjustable chromed carbon steel legs.
- Easily removable stainless steel griddle grease trap.

- 30,000 BTU/h burners placed every 12", providing best performance.
- Manifold pressure is 4" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGCB18	Gas Charbroiler 1 Burner	30,000	18" W x 30.52" D x 16.84" H	132 lbs.
FGCB24	Gas Charbroiler 2 Burner	60,000	24" W x 30.52" D x 16.84" H	183 lbs.
FGCB36	Gas Charbroiler 3 Burner	90,000	36" W x 30.52" D x 16.84" H	258 lbs.
FGCB48	Gas Charbroiler 4 Burner	120,000	48" W x 30.52" D x 16.84" H	329 lbs.







GAS HOT PLATES



Standard Features:

- High efficiency open burners.
- Available in 12", 24", 36", 48" and 60" width.
- Stainless steel panel and sides.
- 12" x 12" cast iron top grates designed for easy movement of pots across top sections.
- Deflectors to direct waste to crumb/drip pan.
- Large front panel, promoting safety and great functionality.

- Chrome plated injected aluminum knobs providing for better toughness and durability.
- 1 year parts and labor warranty.
- 4" adjustable chromed carbon steel legs.
- Easily removable stainless steel crumb/drip pan.

Specifications

- 25,000 BTU total output per burner.
- Manifold pressure is 5" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

Model #	Description	TOTAL BTUs Size		Shipping Weight
FGHP12	Gas Hot Plate 2 Burner	50,000	12" W x 30.52" D x 16.84" H	93 lbs.
FGHP24	Gas Hot Plate 4 Burner	100,000	24" W x 30.52" D x 16.84" H	154 lbs.
FGHP36	Gas Hot Plate 6 Burner	150,000	36" W x 30.52" D x 16.84" H	218 lbs.
FGHP48 📕	Gas Hot Plate 8 Burner	224,000	48" W x 30.52" D x 16.84" H	298 lbs.
FGHP60 📕	Gas Hot Plate 10 Burner	280,000	60" W x 30.52" D x 16.84" H	352 lbs.





For Ordering & Questions Please call: 800.722.6075

GAS THERMOSTATIC GRIDDLES



Standard Features:

- Available in 15", 24", 36", 48", and 60" width.
- Stainless steel panel and sides.
- 14" gauge polished stainless steel construction.
- 3/4" thick polished carbon steel working griddle plate.
- Fully welded griddle plate.
- Enamelled burners placed every 12", providing uniformity when operating.
- 200°F 575°F Energy-saving adjustable thermostat to control desired griddle plate surface temperature.

- Accessible pilots through front panel.
- Chrome plated injected aluminum knobs providing for better toughness and durability.
- 1 year parts and labor warranty.
- 4" adjustable chromed carbon steel legs.
- Easily removable stainless steel griddle grease trap.



- 35,000 BTU/h burners placed every 12", providing best performance.
- Manifold pressure is 4" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGTG15 📕	Gas Thermostatic Griddle 1 Burner	35,000	15" W x 30.52" D x 16.84" H	137 lbs.
FGTG24	Gas Thermostatic Griddle 2 Burner	60,000	24" W x 30.52" D x 16.84" H	196 lbs.
FGTG36	Gas Thermostatic Griddle 3 Burner	90,000	36" W x 30.52" D x 16.84" H	282 lbs.
FGTG48	Gas Thermostatic Griddle 4 Burner	120,000	48" W x 30.52" D x 16.84" H	355 lbs.
FGTG60	Gas Thermostatic Griddle 5 Burner	150,000	60" W x 30.52" D x 16.84" H	439 lbs.







GAS MANUAL GRIDDLES



Standard Features:

- Available in the 15", 24", 36", 48", and 60" width.
- 14" gauge polished stainless steel construction.
- 3/4" thick polished carbon steel working griddle plate.
- Fully welded griddle plate.
- Enamelled burners placed every 12", providing uniformity when operating.
- Accessible pilots through front panel.

- Chrome plated injected aluminum knobs providing for better toughness and durability.
- 1 year parts and labor warranty.
- 4" adjustable chromed carbon steel legs.
- Easily removable stainless steel griddle grease trap.

Specifications

- 30,000 BTU total output per burner.
- Manifold pressure is 5" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGMG15	Gas Manual Griddle 1 Burner	30,000	15" W x 30.52" D x 16.84" H	132 lbs.
FGMG24	Gas Manual Griddle 2 Burner	60,000	24" W x 30.52" D x 16.84" H	194 lbs.
FGMG36	Gas Manual Griddle 3 Burner	90,000	36" W x 30.52" D x 16.84" H	273 lbs.
FGMG48	Gas Manual Griddle 4 Burner	120,000	48" W x 30.52" D x 16.84" H	353 lbs.
FGMG60	Gas Manual Griddle 5 Burner	150,000	60" W x 30.52" D x 16.84" H	430 lbs.





For Ordering & Questions Please call: 800.722.6075

GAS RANGES









Standard Features:

Range

- High efficiency open burners.
- 1 year parts and labor warranty.
- Available in 24" and 36" width.
- Stainless steel panel and sides.
- 12" x 12" cast iron top grates designed for easy movement of pots across top sections.
- Deflectors to direct waste to crumb/drip pan.
- Large front panel, promoting safety and great functionality.
- Chrome plated injected aluminum knobs providing for better toughness and durability.
- Easily removable stainless steel crumb/drip pan.

Oven

- High efficiency open burners.
- Oven with snap action thermostat from 210°F -550°F and 100% safety shut off.
- 26 1/2" Standard bakery depth on all ovens.
- Double-sided enamel oven cavity (Exterior and interior top, bottom, and side).
- Heavy-duty oven wired rack 1/8" diameter.
- The standard oven has 3 shelf positions and 1 rack.
- Counterweight balanced doors for easy opening.

Convection

- Dynamic Airflow Technology (DAT) a patented convection oven with balanced airflow a low profile fan, 26 1/2 "oven depth. Only Convection oven base that fits a full-size sheet pan on all models.
- The convection oven has an on/off switch and high/ low fan speed.

- Manifold pressure is 4" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGR4B	Range 4 Burner with Oven	130,000	24" W x 35" D x 62.52" H	397 lbs.
FGR6B	Range 6 Burner with Oven	185,000	36" W x 35" D x 62.52" H	529 lbs.
FGR6BCO	Range 6 Burner w/ Convection Oven	203,000	36" W x 40.93" D x 62.52" H	584 lbs.
FGR10B	Range 10 Burner with Oven	315,000	60" W x 35" D x 62.52" H	1085 lbs.







GAS RANGES with GRIDDLE







Standard Features:

Griddle

- Stainless steel panel and sides.
- 14" gauge polished stainless steel construction.
- 3/4" thick polished carbon steel working griddle plate.
- Fully welded griddle plate.
- Enamelled burners placed every 12", providing uniformity when operating.
- Accessible pilots through front panel.
- Easily removable stainless steel griddle grease trap.

Range

- High efficiency open burners.
- 1 year parts and labor warranty.
- Stainless steel panel and sides.
- 12" x 12" cast iron top grates
 designed for easy movement of pots
 across top sections.
- Deflectors to direct waste to crumb/ drip pan.
- Large front panel, promoting safety and great functionality.
- Chrome plated injected aluminum knobs providing for better toughness and durability.
- Easily removable stainless steel crumb/drip pan.

Oven

- High efficiency open burners.
- Oven with snap action thermostat from 210°F - 550°F and 100% safety shut off.
- 26 1/2" Standard bakery depth on all ovens.
- Double-sided enamel oven cavity (Exterior and interior top, bottom, and side).
- Heavy-duty oven wired rack 1/8"
- The standard oven has 3 shelf positions and 1 rack.
- Accessible pilots through front panel.
- Easily removable stainless steel griddle grease trap.

- Manifold pressure is 4" W.C. (Natural Gas) or 10" W.C. (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.


Model #	Description	TOTAL BTUs	Size	Shipping Weight
FGR2B24G	FGR2B24G Range Combo 2 Burner w/ Man. Griddle		36" W x 35" D x 62.52" H	549 lbs.
FGR4B12G	Range Combo 4 Burner w/ Man. Griddle	165,000	36" W x 35" D x 62.52" H	525 lbs.
FGR6B24G	Range Combo 6 Burner w/ Man. Griddle	275,000	60" W x 35" D x 62.52" H	871 lbs.





ACCESSORIES



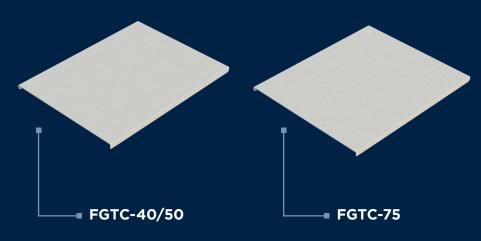







Model #	Description	Shipping Weight
FG-CASTER-KIT-4	Fortress Caster Kit- Set of 4	9.3 lbs.
FG-CASTER-KIT-6	Fortress Caster Kit- Set of 6	14 lbs.
FGTC-40/50	Optional FGF-40/50 Fryer Cover	3.5 lbs.
FGTC-75	Optional FGF-75 Fryer Cover	4.7 lbs.
GHK-36	EasyFlex 36 x 3/4" Gas Hose Kit	7 lbs.
GHK-48	EasyFlex 48 x 3/4" Gas Hose Kit	7 lbs.
FS-SW-034	EasyFlex 3/4" Gas Hose Swivel	2 lbs.



LIMITED ORIGINAL COMMERCIAL EQUIPMENT WARRANTY

Fortress warrants that the equipment, as supplied by the factory to the original purchasers, is free from defects in materials and workmanship because of normal use for a period of one (1) year from the original purchase date or a maximum of eighteen (18) months after the shipment date from Fortress. When evaluating the warranty of each piece of Fortress equipment, proper installation, and start-up in accordance with the instruction manual will be considered. Warranty coverage includes Fortress equipment that is sold only in the Continental United States. Repairs under this warranty are to be performed by a Fortress authorized gas appliance service company that is located nearest to the equipment's location where the equipment is to be repaired.

This standard warranty is subject to the following conditions and limitations. This warranty is limited to product(s) sold by Fortress to the original buyer in the continental United States. Original installation must occur within one (1) year of the date of the original purchase, and proof of the installation date must be provided. Equipment must be located at the original installation location regardless of the same owner. The Fortress warranty is limited to the repair or replacement of any part found to be defective. The Fortress warranty will cover normal labor charges incurred in the repair or replacement of a warranted piece of equipment. This warranty does not apply to any product(s) which have not been installed in accordance with the directions published in the appropriate installation and operation manuals. Fortress will bear no responsibility or liability for any product(s) which have been mishandled, abused, misapplied, misused, subjected to harsh chemical action or poor water quality, field modified by unauthorized personnel, damaged by flood, fire, or other acts of nature, or which have altered or missing serial numbers. Fortress warranty does not authorize the use of any product(s) in a non-commercial application, including but not limited to residential use. The use or installation of the product(s) in non-commercial applications renders all warranties, express or implied, null and void, including any responsibility for damage, costs, and legal actions resulting from the use or installation of the product(s) in any non-commercial setting. Adjustments such as calibrations, leveling, tightening of fasteners or utility connections normally associated with original installation are the responsibility of the installer. Should service be required at times that normally involve premium labor rates, the owner shall be charged for the difference between normal service rates and such premium rates. Exceptions to the standard warranty period are as listed: A two (2) year warranty for fryer tanks only will apply. Warranty shall not apply to defects attributable to the usage environment, for example from using dirty, corrosive water, poor quality gas, or electricity of incorrect current rating or voltage. All damage due to over-voltage is excluded from the warranty. Non-clog range top open burners have a lifetime warranty. Original purchased replacement parts supplied by Fortress will be warranted for 90 days from the parts invoice date. This warranty is for parts cost only and does not include freight or labor charges.

Fortress assumes no liability for misuse or inadequate maintenance of the Product. In no event shall the user by entitled to recover incidental or consequential damages. Including but not limited to; damages for inconvenience, food loss, rental or replacement equipment, loss of profits, or other commercial loss. Warranties stated above are the only warranties made in connection with the sale and distribution of Fortress products. ANY AND ALL OTHER EXPRESSED STATUTORY AND IMPLIED WARRANTIES APPLICABLE TO THE PRODUCT INCLUDING, WITHOUT LIMITATION, ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE ARE EXPRESSLY DISCLAIMED. The warranty information set forth above shall be governed by and construed in accordance with the laws of the State of North Carolina and, if applicable, the laws of the United States of America. The warranty, as stated, is extended only to the original owner/user and is not assignable. Fortress reserves right to change product specifications without notice due to constant product improvement.



FREE FREIGHT PROGRAM

Fortress offers free freight on qualifying orders, as per the above map, unless otherwise specified. Items must be in stock at the time of purchase and must ship from one location to one destination, within the continental United States. No free freight on back orders is allowed, freight charges will be added to your invoice. You can however combine your back orders (once available) with other items to qualify for the free freight allowance. We reserve the right to choose the shipper. Any additional service such as; lift-gate, notification of delivery, inside delivery or other special requirements will be subject to an additional charge to your invoice. Any charges from freight companies that arise due to incorrect addresses provided by the customer or rejected shipments that were previously approved will be charged back to your account.

FREIGHT CLAIM

Before accepting any shipment, inspect it carefully and note any damage or shortage on the freight bill before signing for the delivery. If any concealed damage or shortage is found, notify the carrier within five days and request an inspection. Report any damage to Fortress within five days of delivery. Retain the original packaging for claim purposes. Fortress is not liable for any damage or loss. Our responsibility for shipment ceases with acceptance of the "Bill of Lading" by the carriers.





2022 Catalog

GAS COOKING

For Ordering & Questions Please call: 800.722.6075

www.fortress-cke.com



FORTRESS

© Copyright 2022 Fortress. All rights reserved. Reproduction without written permission is prohibited.



